


DUCHESNE COUNTY MONUMENT SURVEY RECORD

LINE	BEARING	DISTANCE
L1	N 11°21'56" E	243.62'
L2	N 43°07'59" E	72.11'
L3	N 83°59'12" E	49.60'
L4	S 44°45'50" E	68.09'

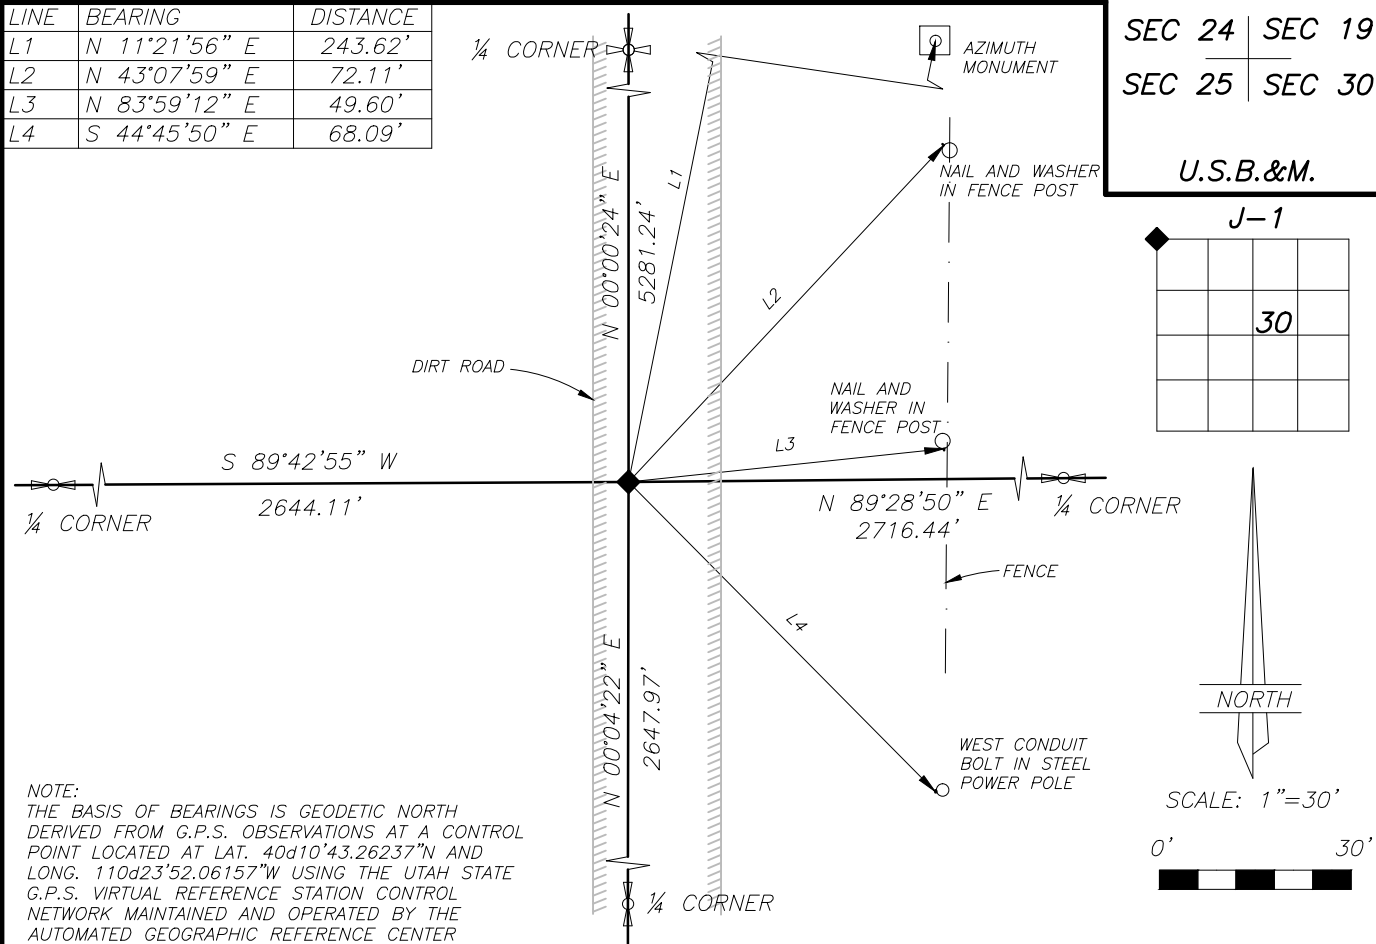

DESCRIPTION OF CORNER EVIDENCE FOUND

FOUND A DUCHESNE COUNTY MONUMENT IN CONCRETE. PREVIOUSLY REPLACED ORIGINAL G.L.O. BRASS CAP THAT CITY ROAD DEPARTMENT DESTROYED. RESET FROM TIES.



MARKINGS ON MONUMENT

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THE CORNER

USED NAIL AND WASHERS, UTILITY FEATURES, AND ADJOINING CORNERS AS REFERENCE POINTS AS SHOWN

STATE PLANE COORDINATE DATA

(U.S. SURVEY FEET)  
NAD83 UTAH CENTRAL ZONE  
N: 7242951.821  
E: 1950666.872  
NAVD88 EL: 5833.01'

LATITUDE: 40°11'54.56274" N  
LONGITUDE: 110°23'21.36204" W  
ELLIPSOID HEIGHT: 5777.01'  
(GEOID 03 CONUS)  
PUBLIC LAND SURVEY SYSTEM GCDB ID NO.  
UT300030S0040W0\_100300



PHOTO OF MONUMENT FACING SOUTH

CERTIFICATION

I, Jerry D. Allred, Professional Land Surveyor, State of Utah, do hereby certify that I have performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve same

Date 11 DEC '17

Jerry D. Allred, Professional Land Surveyor  
Certificate No. 148951  
Duchesne County Surveyor

